



USE APWA STD. PLAN 205 TYPE A

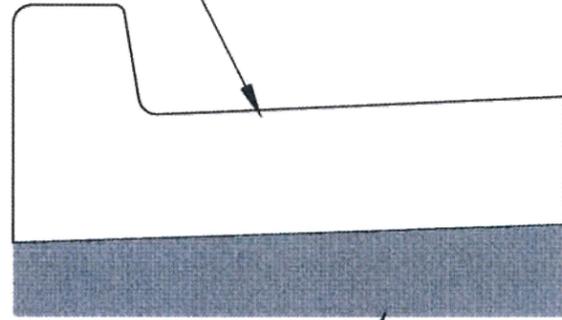


4-INCH MIN. UNTREATED BASE COURSE
COMPACTION: 96% MOD. PROCTOR

HIGH BACK - CURB & GUTTER

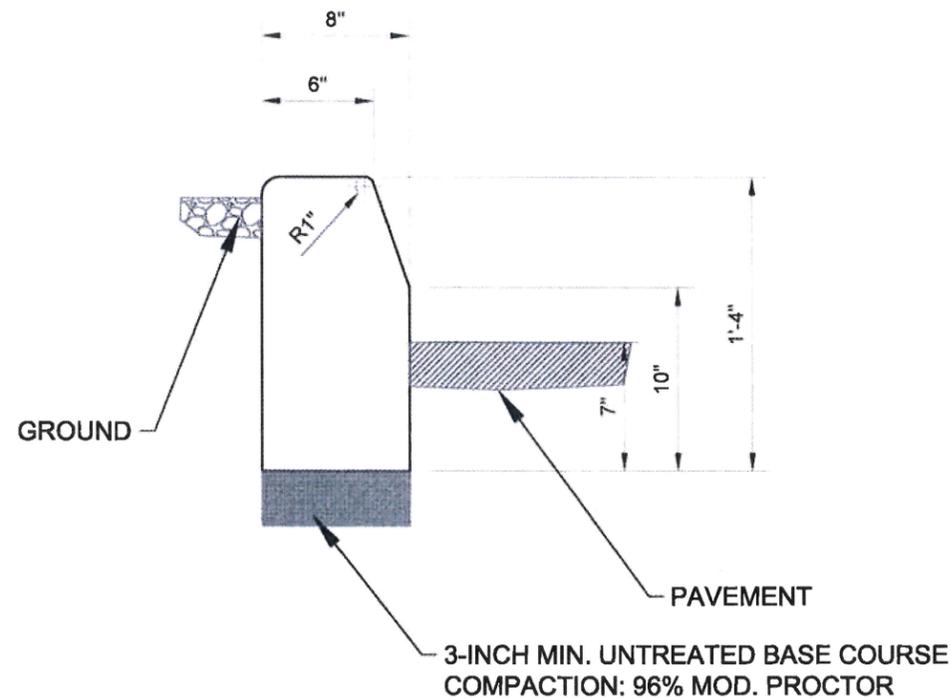

SINGLE CURB

(MEDIANS & PARKING LOTS ONLY)

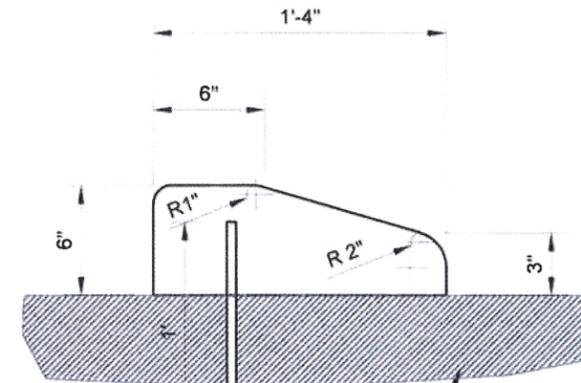

No. 4 REBAR
@ 5 FEET MAX O.C.

PAVEMENT

SINGLE CURB - LOW

NOTES:

1. FLATTEN GUTTERS AT ADA RAMP LOCATIONS. GUTTERSLOPES MAY BE REDUCED BETWEEN RAMPS AS WELL AS AT CURB RAMPS WHERE MORE THAN ONE RAMP WILL BE CONSTRUCTED AT A CORNER.
2. USE APWA CLASS 3000 CONCRETE OR APPROVED EQUAL OR BETTER.
3. MEASURE CURB HEIGHT FROM THE GUTTER.
4. DO NOT USE SINGLE CURB AS GUTTERS.
5. THE CITY ENGINEER MAY APPROVE SPECIFIC DESIGNS WHEN VARIATIONS FROM THE STANDARDS ARE NEEDED DUE TO SITE CONDITIONS, UTILITY, OR TOPOGRAPHICAL CONSTRAINTS. ANY VARIANT OF THESE DETAILS MUST BE BASED UPON A DESIGN STAMPED BY A UTAH LICENSED PROFESSIONAL CIVIL ENGINEER.



City of Bluffdale
Engineering Standards
Approved *Michael [Signature]* *6/13/13*
City Engineer Date

STANDARD DETAIL TITLE
CONCRETE CURB AND GUTTER

DETAIL SERIES:
STREETS
DETAIL NO.
ST02