



MINOR COLLECTOR

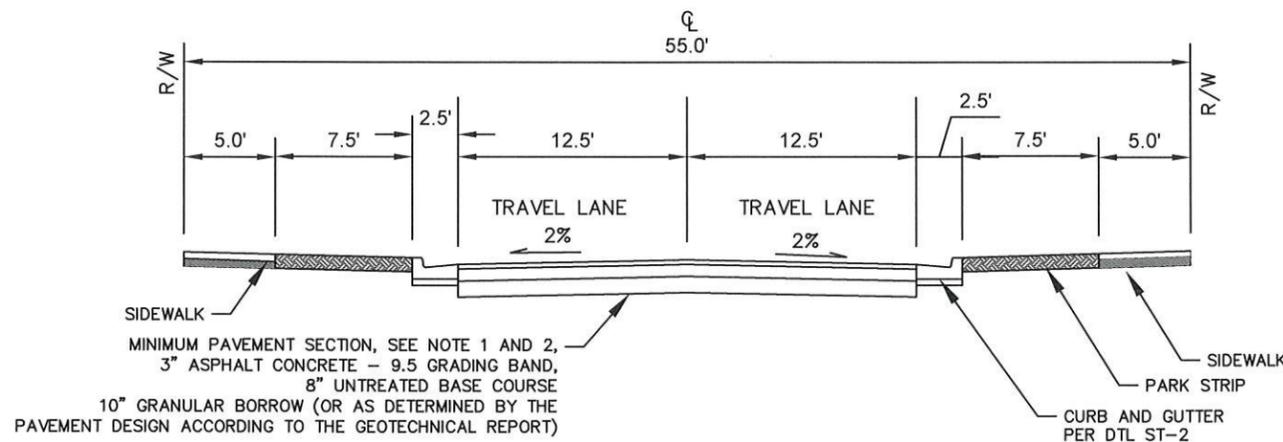

STANDARD RESIDENTIAL A

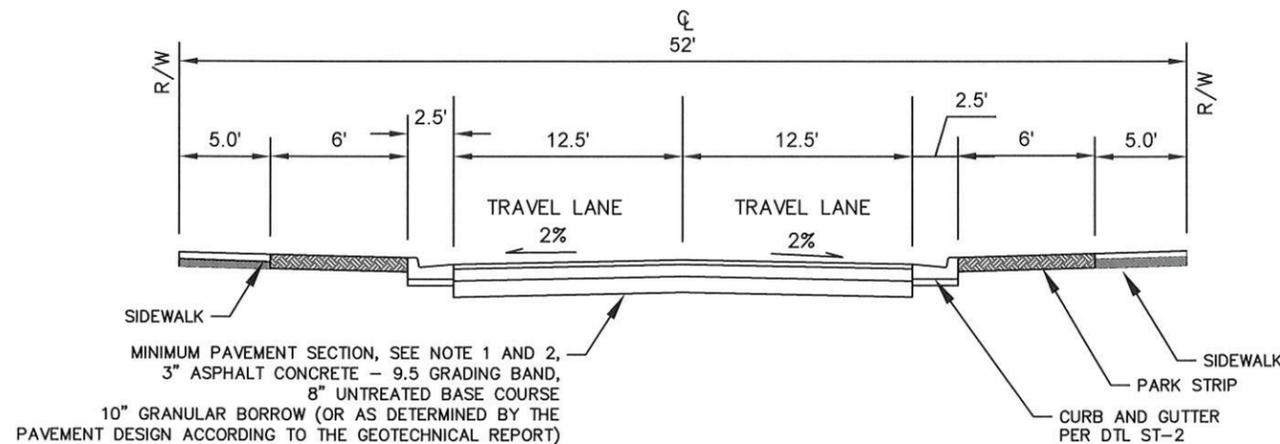

STANDARD RESIDENTIAL B—ONLY ALLOWED IN ZONE R-1-43

NOTES:

1. ASPHALT CONCRETE: USE SUPERPAVE HMA IN ACCORDANCE WITH APWA 32 12 06.05 WITH THE FOLLOWING:
 - A. USE SP-1/2, PG64-28 BINDER, 75Nd UNLESS OTHERWISE SPECIFIED.
 - B. DO NOT INCORPORATE MORE THAN 15% RAP
 - C. MEET MINIMUM VMA OF 14.5% FOR SP-1/2 AND 13.5% FOR SP-3/4 GRADATIONS.
2. INSTALL ASPHALT CONCRETE IN ACCORDANCE WITH APWA 32 12 16
3. PROVIDE THAT THE ROAD DRAINS PROPERLY AND IS FREE OF ANY STANDING WATER ON ANY PORTION OF THE PAVEMENT.
4. PROVIDE LANDSCAPING IN PARK STRIP IN ACCORDANCE WITH CITY ORDINANCES.
5. SEAL NEW PAVEMENT WITH A SAND SLURRY AFTER ONE YEAR OF PAVEMENT PLACEMENT.
6. USE RESIDENTIAL ASPHALT CONCRETE CRITERIA (SEE CROSS-SECTION) FOR PATHWAYS, SIDEWALKS AND PARKING LOTS.
7. THE CITY ENGINEER MAY APPROVE SPECIFIC DESIGNS WHEN VARIATIONS FROM THE STANDARDS ARE NEEDED DUE TO SITE CONDITIONS, UTILITY, OR TOPOGRAPHICAL CONSTRAINTS. ANY VARIANT OF THESE DETAILS MUST BE BASED UPON A DESIGN STAMPED BY A UTAH LICENSED PROFESSIONAL CIVIL ENGINEER.



City of Bluffdale
Engineering Standards

Approved *Michael Lopez*
City Engineer Date 7/11/16

STANDARD DETAIL TITLE

TYPICAL STREET CROSS-SECTIONS PART 2

DETAIL SERIES:
STREETS

DETAIL NO.
ST-7B